


## LZM Series Acrylic Flow Meter

### LZM-ZT Series

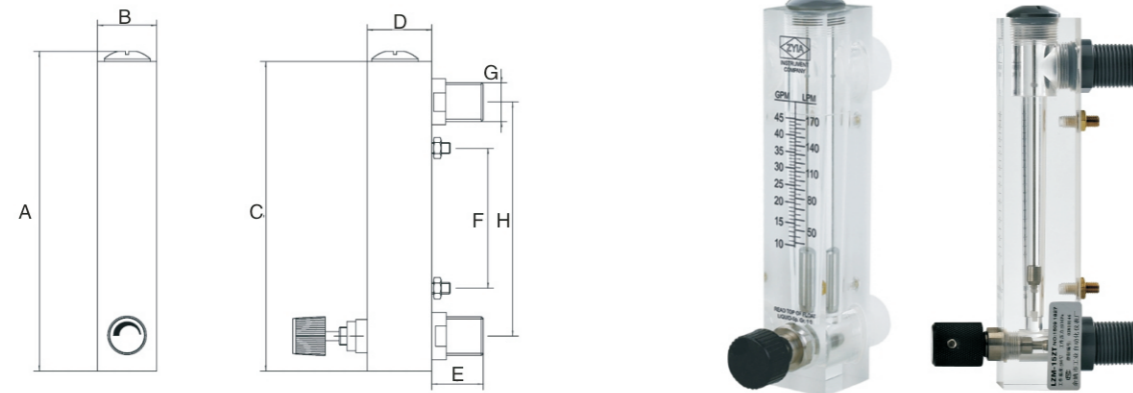

#### Technical Parameters of LZM-ZT Series Flow Meter

| Model     | Range        |              |   | Screw Thread               | Accuracy | Size ( mm ) |    |     |    |    |     |    |     |
|-----------|--------------|--------------|---|----------------------------|----------|-------------|----|-----|----|----|-----|----|-----|
|           | GPM (Liquid) | LPM (Liquid) | Nm <sup>3</sup> /h(Gas)   |                            |          | A           | B  | C   | D  | E  | F   | G  | H   |
| LZM-15ZAT |              | 15-150LPH    | 0.1-1 0.16-1.6<br>0.3-3 0.4-4   | (M)1/2"BSPT<br>(F)1/4"BSPT | ±4%      | 157         | 32 | 150 | 35 | 25 | 60  | 25 | 110 |
| LZM-15ZT  |              | 10-100LPH    | 0.04-0.4 0.16-1.6<br>0.1-1 0.25-2.5<br>0.3-3 0.4-4<br>0.6-6 0.8-8<br>1-10 1.6-16<br>2.5-25 4-40 |                            |          | 175         | 32 | 168 | 35 | 25 | 76  | 25 | 127 |
|           |              | 16-160LPH    |   |                            |          |             |    |     |    |    |     |    |     |
|           | 0.1-1        | 0.5-4        |   |                            |          |             |    |     |    |    |     |    |     |
|           | 0.2-2        | 1-7          |   |                            |          |             |    |     |    |    |     |    |     |
| LZM-25ZT  | 0.3-3        | 1-11         |   | (M)1"BSPT                  | ±4%      | 234         | 45 | 226 | 46 | 33 | 100 | 37 | 160 |
|           | 0.5-5        | 2-18         |   |                            |          |             |    |     |    |    |     |    |     |
|           | 2-10         | 5-35         |   |                            |          |             |    |     |    |    |     |    |     |
|           | 4-14         | 10-50        |   |                            |          |             |    |     |    |    |     |    |     |
|           | 6-20         | 20-70        | 20-100 35-350<br>40-160 50-250  |                            |          |             |    |     |    |    |     |    |     |


#### The material of the LZM-ZT series Flow Meter

| Fitting  | Float  | O-ring                                 |
|--|--------|--|
| √ 1.ABS<br>2.PP<br>3.PVC<br>4.Brass<br>5.Brass chromeplate<br>6.SS | √ 1.SS | √ 1.Silicon rubber<br>2.Fluorin rubber |

Note:Mark with√, the material of the Flow Meter is the General Configuration

## LZM Series Acrylic Flow Meter

### LZM-T Series

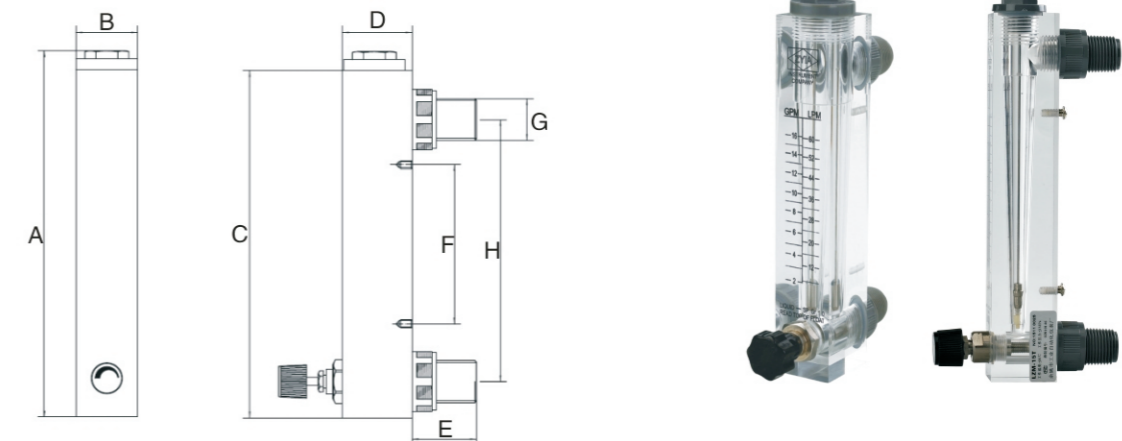

#### Technical Parameters of LZM-T Series Flow Meter

| Model   | Range        |              |                             | Screw Thread | Accuracy | Size ( mm ) |    |     |    |    |     |    |     |
|---------|--------------|--------------|-----------------------------|--------------|----------|-------------|----|-----|----|----|-----|----|-----|
|         | GPM (Liquid) | LPM (Liquid) | Nm <sup>3</sup> /h(Gas)     |              |          | A           | B  | C   | D  | E  | F   | G  | H   |
| LZM-15T | 0.1-1        | 0.5-4        | 1-10 1.6-16<br>2.5-25 4-40  | (M)1/2"BSPT  | ±4%      | 216         | 32 | 206 | 37 | 36 | 100 | 28 | 165 |
|         | 0.2-2        | 0.8-8        |                             |              |          |             |    |     |    |    |     |    |     |
|         | 0.3-3        | 1-11         |                             |              |          |             |    |     |    |    |     |    |     |
|         | 0.5-5        | 2-18         |                             |              |          |             |    |     |    |    |     |    |     |
| LZM-20T | 2-10         | 8-40         | 2.5-25 6-60<br>16-80 16-160 | (M)3/4"BSPT  | ±4%      | 233         | 39 | 220 | 44 | 42 | 100 | 37 | 165 |
|         | 2-16         | 8-60         |                             |              |          |             |    |     |    |    |     |    |     |
| LZM-25T | 3-13         | 10-50        |                             | (M)1"BSPT    | ±4%      | 253         | 44 | 240 | 50 | 31 | 100 | 37 | 175 |
|         | 6-24         | 20-100       |                             |              |          |             |    |     |    |    |     |    |     |
|         | 10-35        | 30-130       |                             |              |          |             |    |     |    |    |     |    |     |
|         | 10-45        | 30-170       |                             |              |          |             |    |     |    |    |     |    |     |

#### The material of the LZM-T series Flow Meter

| Fitting  | Float  | O-ring                                 |
|--|--------|--|
| √ 1.ABS<br>2.PP<br>3.PVC<br>4.Brass<br>5.Brass chromeplate<br>6.SS | √ 1.SS | √ 1.Silicon rubber<br>2.Fluorin rubber |

Note:Mark with√, the material of the Flow Meter is the General Configuration