

# AGRU Seal Clean Gasket


## Innovative Pipe Gasket

### Properties

- Made from 100 % virgin PTFE
- PTFE with a multidirectionally orientated fibrous structure
- Very low permeation
- Strong dimensional stability and creep resistance
- Perfect resistance against chemicals and high temperatures
- High blowout resistance

### Features

- Available for DIN, ANSI and JIS flange connections in plastic piping systems
- Plastic piping systems provide minimal dead leg area and full flush performance for flange connection
- Solves the current problems of centering in comparison to other gasket systems
- Seals highly permeable and aggressive fluids
- Seldom needs retorquing of flange connections even with temperature changes
- Superior sealing reliability and long gasket life

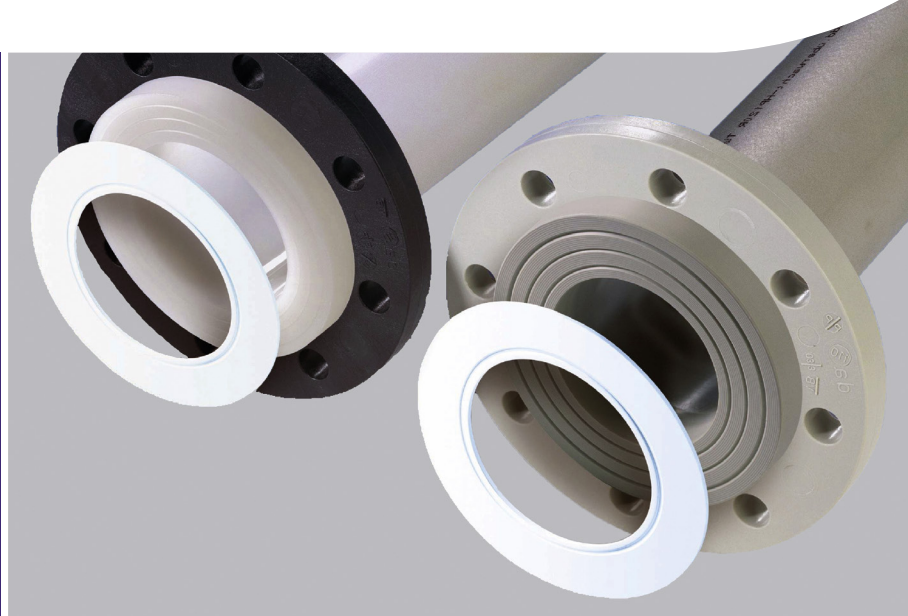

AGRU provides with the Seal Clean gasket a complete plastic piping system to fulfil the high requirements for the transport of Ultra Pure Water, chemicals and aggressive medias. The Seal Clean gasket exhibits outstanding pressure and creep resistance combined with high stability. In comparison to other gaskets, the Seal Clean provides significant less settlement because of its better creep behaviour and therefore a better leak tightness even with occurring temperature changes.



### PRODUCT RANGE - GASKET THICKNESS 3 MM

Norm	Dimension	Pipe SDR class
DIN	20, 25, 32, 40, 50, 63, 75	SDR 21
	90, 110, 125, 140, 160, 180, 200, 225, 250	SDR 21/33
ANSI	20, 25, 32, 40, 50, 63, 75	SDR 21
	90, 110, 125, 160, 200, 225, 250	SDR 21/33
JIS	20, 25, 32, 40, 50, 63, 75	SDR 21
	90, 110, 125, 140, 160, 200, 225, 250	SDR 21/33