

GAUGE VALVE 20mm, 25mm (3/4inch, 1inch)

●20mm (3/4inch)



Flanged Elbow

●25mm (1inch)



●25mm (1inch)



FEATURES

Backflow Prevention

- The contact surface is sealed with an anti-corrosive diaphragm.
- The gauge pipe can easily be installed by inserting the pipe and tightening the union nut.
- The GAUGE VALVE has a drain plug G¹/₄ in diameter which helps to maintain the valve (Sampling is possible by removing the plug).


SPECIFICATIONS

Unit:mm

Nominal Size	20mm (3/4inch)	25mm (1inch)
Gauge Pipe Outer Size	18	26
Body material	Unplasticized Polyvinyl Chloride(PVC), Polypropylene (PP)	
Nominal Size	20mm(3/4inch) - 25mm(1inch)	
Working Temperature	PVC:0°C - 50°C(30°F - 120°F), PP :-20°C - 80°C(-5°F - 175°F)	
Max. Working Pressure	0.5MPa{5.1kgf/cm ² }[70PSI]	

WORKING PRESSURE VS. TEMPERATURE

GAUGE VALVE

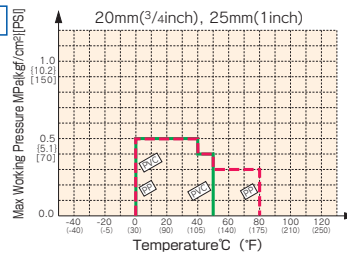




DIMENSIONS

●20mm (3/4inch)

●25mm (1inch)

Flanged Elbow

●25mm (1inch)

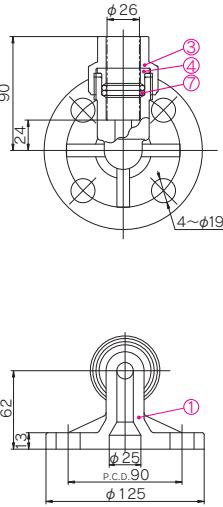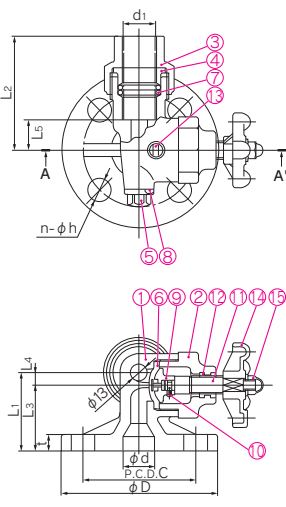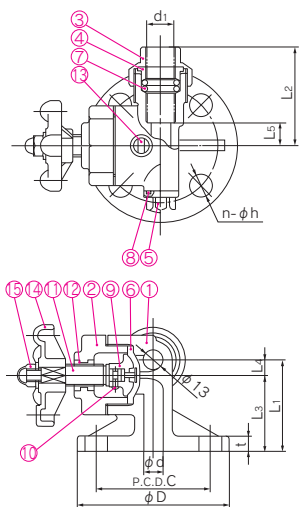

PARTS & MATERIALS

No.	DESCRIPTION	Pcs.	MATERIAL
①	BODY	1	PVC, PP
②	BONNET	1	PVC, PP
③	GLAND NUT	1	PVC, PP
④	GLAND	1	PVC, PP
⑤	DRAIN PLUG	1	PVC, PP
⑥	DIAPHRAGM	1	EPDM, PTFE, Others
⑦	O-RING (A)	2	EPDM, PTFE, Others
⑧	O-RING (B)	1	EPDM, PTFE, Others
⑨	COMPRESSOR	1	PVDF
⑩	COMPRESSOR PIN	2	STAINLESS STEEL304
⑪	STEM	1	COPPER ALLOY(C3604)
⑫	INSERTED METAL OF BONNET	1	COPPER ALLOY(C3604)
⑬	INDICATION OF MATERIAL	1	PAPER
⑭	HAND WHEEL	1	PP
⑮	NUT	1	STAINLESS STEEL304

DIMENSIONS TABLE

JIS														Unit:mm
Nominal Size		d	JIS 10K				L ₁	L ₂	L ₃	L ₄	L ₅	t	d ₁	
mm	inch		D	C	n	h								
20	3/4	13	100	75	4	15	60	64	50	10	15	10	18	
25	1	25	125	90	4	19	62	90	52	10	24	13	26	

DIN														Unit:mm
Nominal Size		d	DIN PN 10				L ₁	L ₂	L ₃	L ₄	L ₅	t	d ₁	
mm	inch		D	C	n	h								
20	3/4	13	105	75	4	14	60	64	50	10	15	10	18	
25	1	25	115	85	4	14	62	90	52	10	24	13	26	

ANSI														Unit:inch
Nominal Size		d	ANSI CLASS 150				L ₁	L ₂	L ₃	L ₄	L ₅	t	d ₁	
inch	mm		D	C	n	h								
3/4	20	0.51	3.88	2.75	4	0.62	2.36	2.52	1.97	0.39	0.59	0.39	0.71	
1	25	0.98	4.25	3.12	4	0.62	2.44	3.54	2.05	0.39	0.94	0.51	1.02	