

Portable and Powerful Test Pumps



PIPE TOOLS & VISES
SINCE 1896



Great for
fire sprinkler
& mechanical
contractors!

Gauge included and
easily readable.

Drill Powered Hydrostatic Test Pump

- Requires ½" cordless 18 volt or higher drill or electric drill (not included)
 - 1500 RPM drill recommended; pump range is 300 - 2000 RMP.
- Separate drill keeps weight off the pump, making it lightweight and portable.
 - Almost 30 pounds lighter than the EHTP500.
- No drop cord needed when used with a cordless drill!
- Designed for testing residential and commercial water systems.
- 15-foot High Pressure Output Hose (included) has quick disconnect feature.
- Output pressure adjusts easily from 0-500 psi simply by turning the large red knob.
- Seal replacement kits available.



DPHTP500



| | |
|----------------|--|
| Model | DPHTP500 |
| Item Code | 08177 |
| PSI | 500 |
| Gallons/Minute | 1.3 @ 1500 RPM |
| Liters/Minute | 4.5 @ 1500 RPM |
| INLET* | 3/4" garden hose |
| OUTLET | 3/8" NPT |
| POWER SOURCE | 18V cordless or electric drill with 1/2" |
| WEIGHT | 8.5 lb. (3.9 kg) |



*Inlet hose not included.



REAR VIEW
showing drill shaft.

Electric Hydrostatic Test Pumps

- Pressure test water systems such as water meters, plumbing lines, pressure vessels, solar systems and sprinkler systems, in both residential and commercial buildings.
- Hose features a quick disconnect with built-in check valve, which allows for convenient setup and portability.
- Smooth running, quiet motor.
- Each test pump includes a 15-foot (4.6m) high pressure hose (EHTPOUTHOSE) for filling the system.

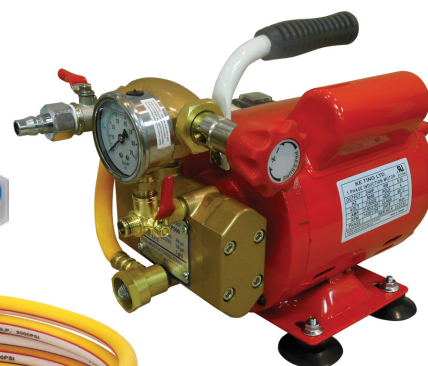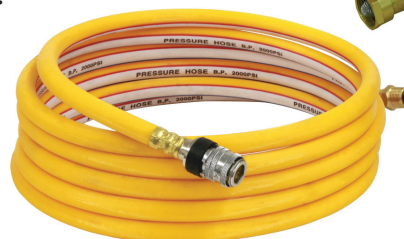

EHTP500

| | | |
|-----------------------|--|---|
| Models | EHTP500 #08170 110V, single phase 50/60 Hz | EHTP500C #08175 110V, single phase 50/60 Hz |
| | EHTP500E #08171 220V, single phase 50/60 Hz | EHTP500CE #08176 220V, single phase 50/60 Hz |
| PSI | 500 | 500 |
| Gallons/Minute | 2 | 2 |
| Liters/Minute | 7 | 7 |
| INLET * | 3/4" garden hose | 3/4" garden hose |
| OUTLET | 3/8" NPT | 3/8" NPT |
| MOTOR | 3/4 HP | 3/4 HP |
| DIMENSIONS | L 14 1/2 X H 11 X W 8 1/2 | L 17 X H 13 1/2 X W 13 1/2 |
| WEIGHT | 37.5 lb. (17.0 kg) | 48.0 lb. (21.8 kg) |

*Inlet hose not included.



EHTP500C



Manual Hydrostatic Test Pumps

HTP300 (300 psi) and HTP1000 (1000 psi)

- Economical.
- Consider manual pumps for infrequent use.



HTP300

Combo Roll Groovers perform both power and manual grooves with ease. And since they're from Reed, they're built to last – delivering reliable, consistent tracking over the long haul.

- 1-1/4"-6" capacity (32-152 mm)
- Grooves Sch. 10 and Sch. 40 steel, stainless steel & aluminum pipe.


Related Product - RG6S Roll Groover

- Compact design for 1-1/4" - 6" Sch. 5S - 40 steel pipe.
- Powered by Reed 5301PD Power Drive (sold separately).



RGCOMBO2

Manual Grooving
2-in-1 tool!
Power Grooving



RGCOMBO2 with 5301PD COMP
(sold separately)



Reed Manufacturing Company

Erie, PA 16502 USA • 800-666-3691 • 814-452-3691

www.reedmfgco.com

